




NOSLER M48 INSTALLATION INSTRUCTIONS

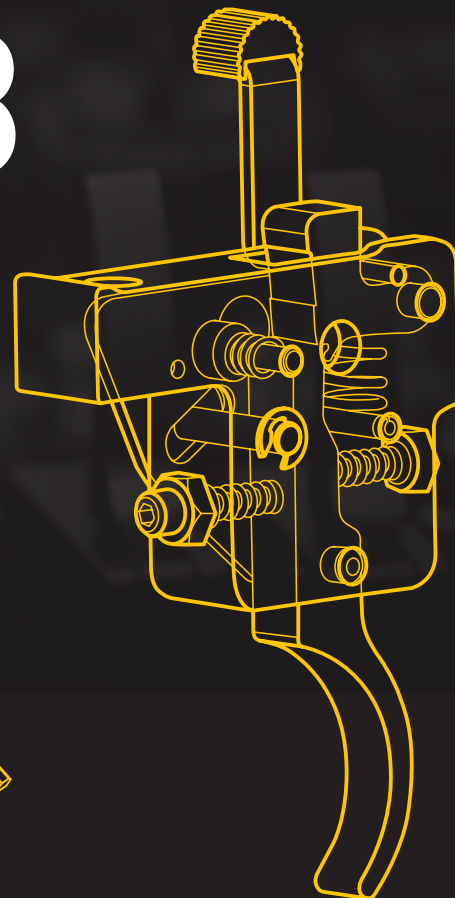

Thank you for purchasing this Timney Trigger. It has been designed and manufactured to provide you with a lifetime of dependable service. Each trigger is hand tested and calibrated on a rifle action before leaving our factory. Please read these instructions fully before you begin installing the trigger, you'll be glad you did.

TOOLS NEEDED:



Torx Wrench



5/32" Hex Wrench

TIMNEY TRIGGER GUARANTEE

Material and workmanship: This Timney trigger has been carefully inspected, tested and adjusted to give a lifetime of dependable service. Every possible care has been exercised in its design and construction. If any defect in workmanship or material should develop under conditions of normal use and service, any necessary repairs, including parts and labor will be made at NO CHARGE to the purchaser providing that our inspection reveals parts were not damaged through accident, alteration, misuse, abuse or other causes beyond our control. We neither assume nor imply any oral or statutory warranties, and we neither assume nor authorize any person to assume for us any obligation or liability in connection with this trigger. Repairs or disassembly of this trigger in any manner without specific authorization, voids the guarantee.


**IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON
WWW.TIMNEYTRIGGERS.COM OR CONTACT US**

Timney can also install your trigger for \$40.00 plus \$35.00 shipping and handling.

Mail: 2020 W Quail Ave, Phoenix AZ. 85027 **Phone:** 623-223-1111 **Fax:** 623-223-1112 **Support:** technicalsupport@timneyusa.com

INSTALLATION INSTRUCTIONS

- 1 Verify that the chamber is clear and the magazine is unloaded before beginning any work on the firearm.
- 2 Remove the bolt
- 3 With the appropriate Torx driver remove the action screws as seen in the bottom metal in order to lift the barreled action of the stock
- 4 With a 5/32 hex key remove the stock trigger and replace with your new Timney trigger
- 5 Insert the barreled action back into the stock and reinstall the action screws to the factory recommended torque settings
- 6 Re-insert the bolt, perform a function check of both the trigger and safety and you are ready to enjoy your new Timney trigger
- 7 The trigger is pre-set at 3lbs pull weight. If desired the pull weight can be reduced by loosening the locknut and turning the pull weight screw in the front of the trigger group counter clock wise. When satisfied re-secure the locknut.
- 8 You are now ready to enjoy your new Timney Trigger.

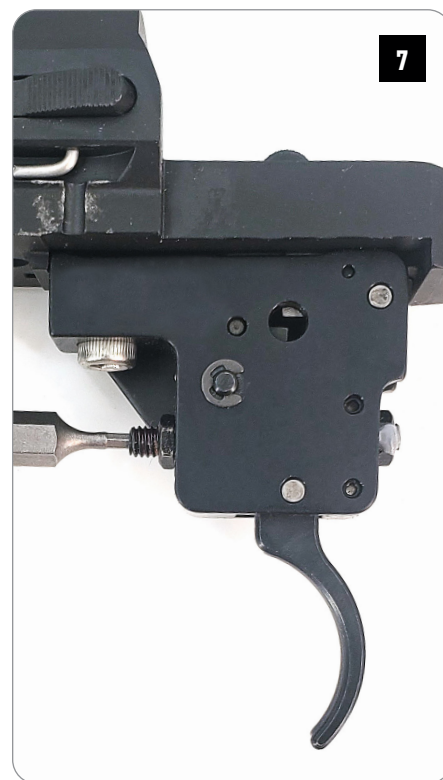

MADE IN THE
USA

IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON WWW.TIMNEYTRIGGERS.COM OR CONTACT US

Timney can also install your trigger for \$40.00 plus \$35.00 shipping and handling. **Mail:** 2020 W Quail Ave, Phoenix AZ. 85027
Phone: 623-223-1111 **Fax:** 623-223-1112 **Support:** technicalsupport@timneyusa.com

